

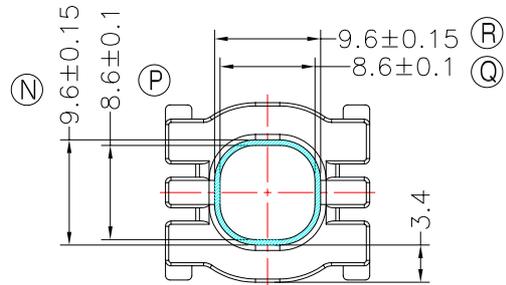
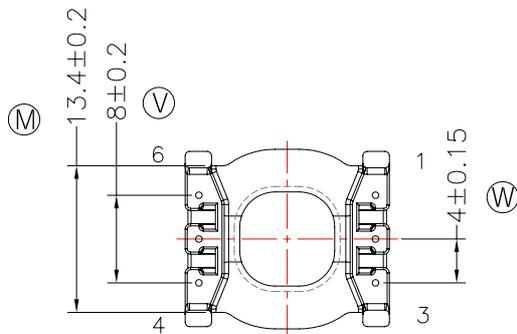
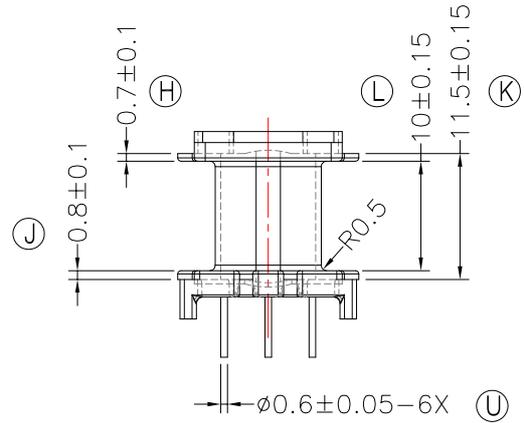
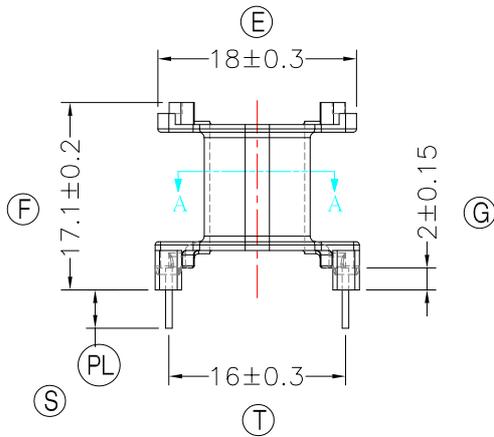


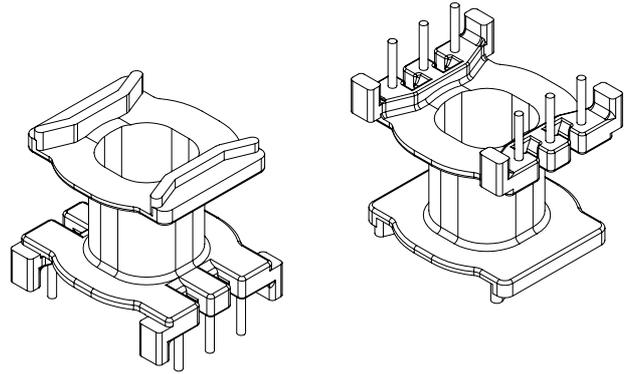

TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http://tbi-tw.com e-mail : tb6688@ms46.hinet.net


| REVISIONS | | | | |
|-----------|-----|----------|---------|----------|
| REV | SYM | DRAFTER | CHECKER | DATE |
| ① | | G.F.YANG | W.H.HSU | 04/13/21 |
| ② | | | | |
| ③ | | | | |

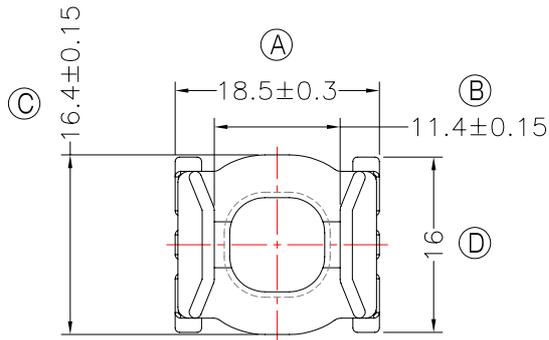

SECTION A-A

- NOTE:
1. 焊錫前拉力: 1.0KG MIN
 2. 焊錫後拉力: 1.5KG MIN
 3. 任意一點強度須1.0kg MIN;
 4. WINDING SPACE: 3.4mm*10mm=34mm²

| | | | | | |
|--------------------|------------------------|---------------------|--------------------|---------------------------|------|
| DWG NO. | ATQ21-16.8-6P-TH-A7-17 | | | | |
| PART NO. | MATERIAL (BOBBIN) | MATERIAL (TERMINAL) | TERMINAL (PLATING) | PIN ALLOCATION | NOTE |
| TBI-238-13171.1706 | PM-9823 | CP WIRE | Sn | ALL PIN (PL)=3.3±0.2 | S |
| TBI-238-13171.1716 | PM-9823 | CP WIRE | Sn | CUT PIN#2,6 (PL)= 3.3±0.2 | H |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |



TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L:±0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1