




TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.





Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
①		X.H.GU	G.F.YANG	01/31/18
②				
③				

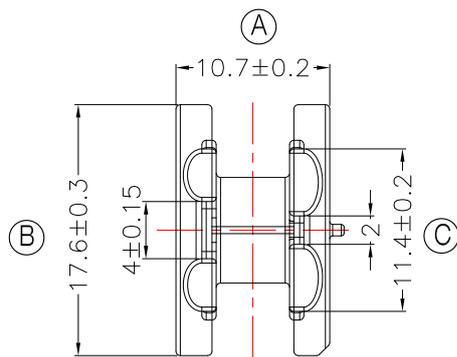

A 強度1.3Kg MIN

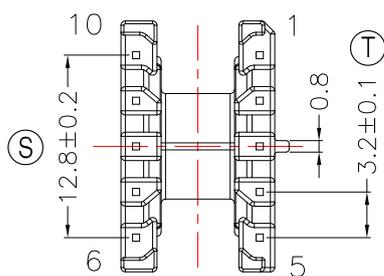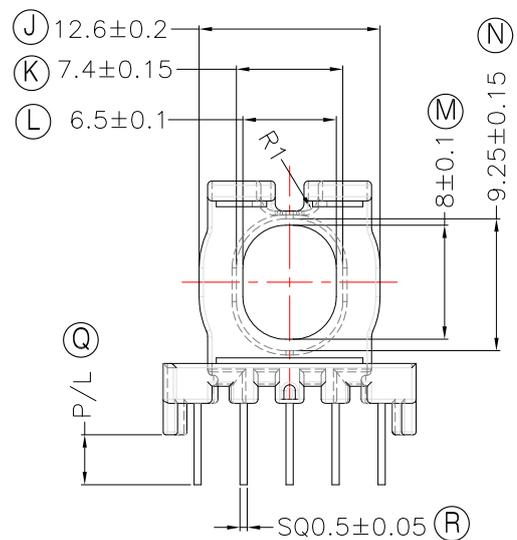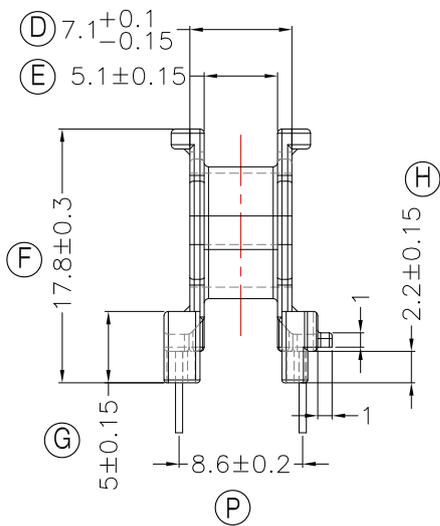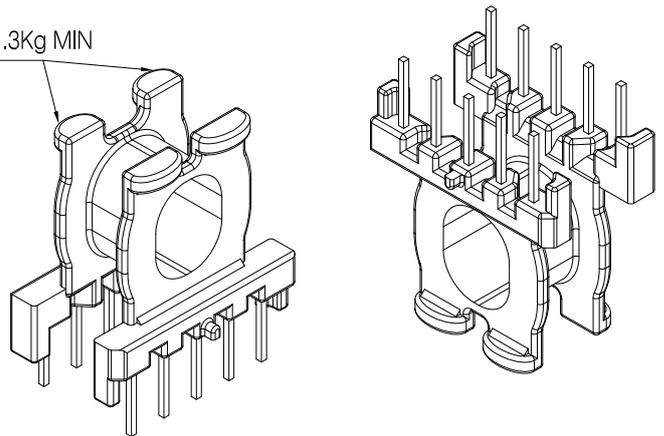


NOTE:

- 耐壓4.0Kv /1.5mA 60S;
- 焊錫溫度:450°±10° 3SEC
- 焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
- 任意一點強度須1.5kg MIN,(除以下測試點.A.處為1.3kg MIN);
- WINDING SPACE:5.1mm*2.6mm=13.26mm²

DWG NO. ATQ17-11.5A-10P-TH-A0-17

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-26101.1706	PM-9823	CP WIRE	Sn	ALL PIN PL =3.5±0.2	S
TBI-238-26101.1716	PM-9823	CP WIRE	Sn	CUT PIN#6,7,8,9,10 PL=3.0±0.2	H
TBI-238-26101.1726	PM-9823	CP WIRE	Sn	CUT PIN#6,10 PL=3.0±0.2	



TOLERANCE:0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3

UNIT : m / m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μ m (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1