

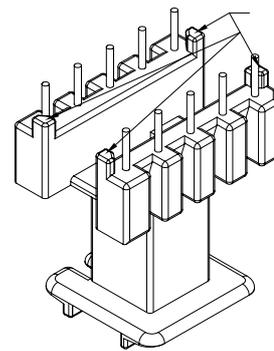
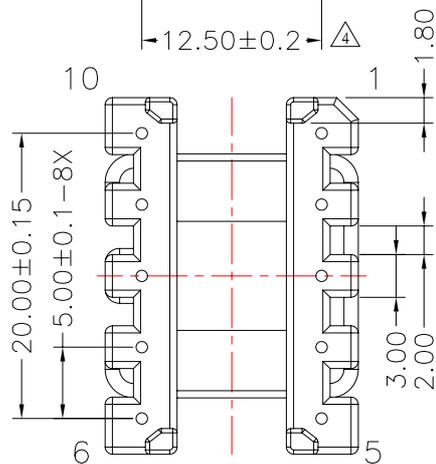
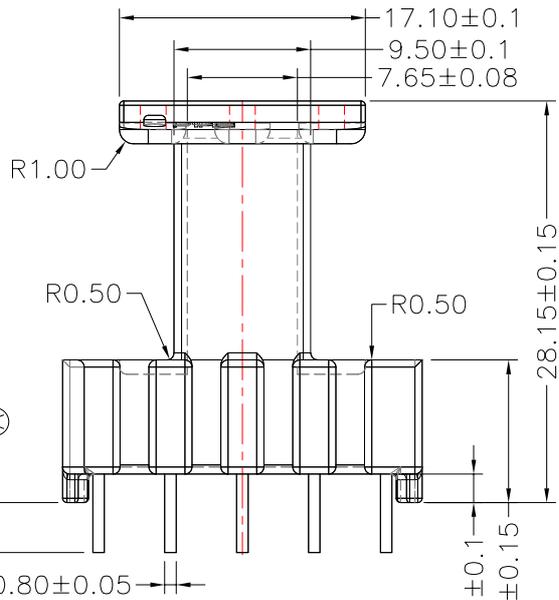
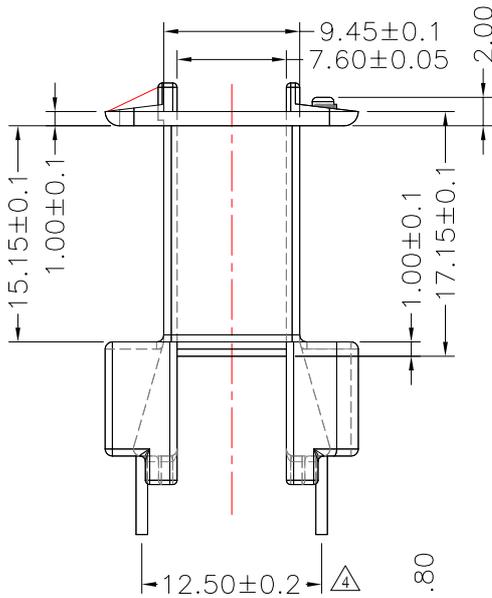


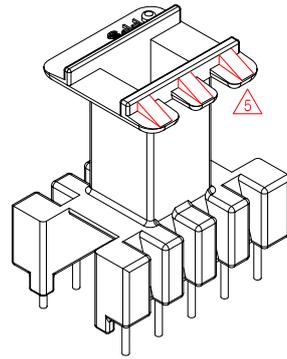

TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△3		G.F.YANG	W.H.HSU	03/27/08
△4		YAN.TANG	G.F.YANG	06/02/08
△5		YAN.TANG	G.F.YANG	03/29/10

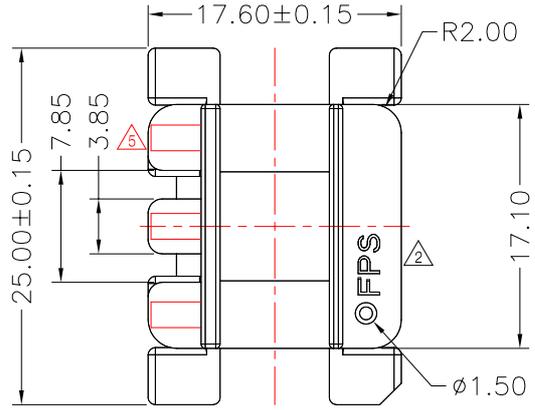

DWG NO.	EF25-10P-TH-5.0-A5-12					
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE	
TBI-205-05151.1206	PM-9820	CP WIRE	Sn	ALL PIN (A)=3.5±0.3		
△4 TBI-205-05151.1216	PM-9820	CP WIRE	Sn	CUT PIN #10 (A)=3.5±0.3	H.C	
△4 TBI-205-05151.1226	PM-9820	CP WIRE	Sn	CUT PIN #10 (A)=3.2±0.3		
△4 TBI-205-05151.1236	PM-9820	CP WIRE	Sn	CUT PIN #10 (A)=4.2±0.2		
△4 TBI-205-05151.1246	PM-9820	CP WIRE	Sn	CUT PIN #6 (A)=3.2±0.3		
F TBI-205-05151.1256	PM-9820	CP WIRE	Sn	CUT PIN #6 (A)=4.2±0.2	F	
TBI-205-05151.1266	PM-9820	CP WIRE	Sn	CUT PIN #2,6 (A)=3.2±0.2		
TBI-205-05151.1276	PM-9820	CP WIRE	Sn	CUT PIN #10 (A)=4.5±0.3		
	TOLERANCE: .XX±0.25 .XXX±0.13			UNIT : m/m	SCALE 2 : 1	

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 5