

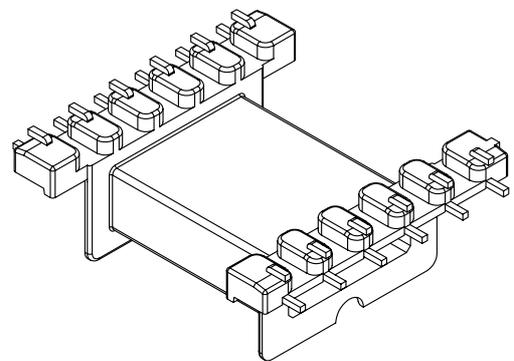
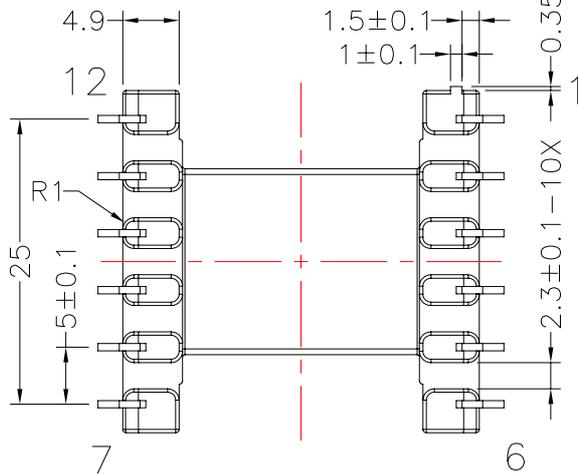
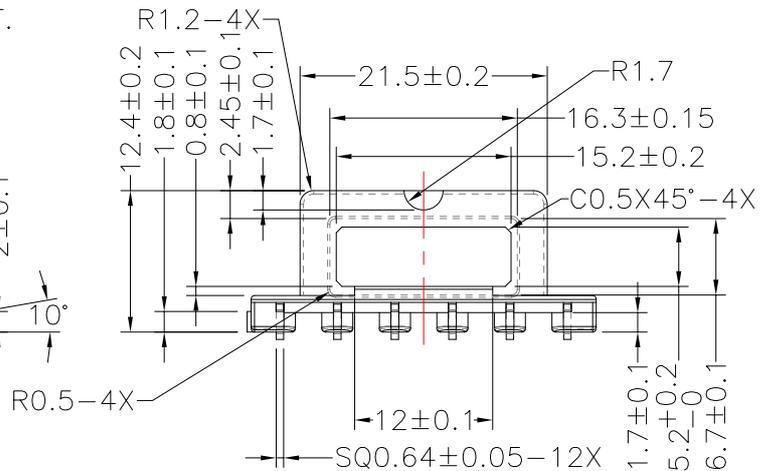
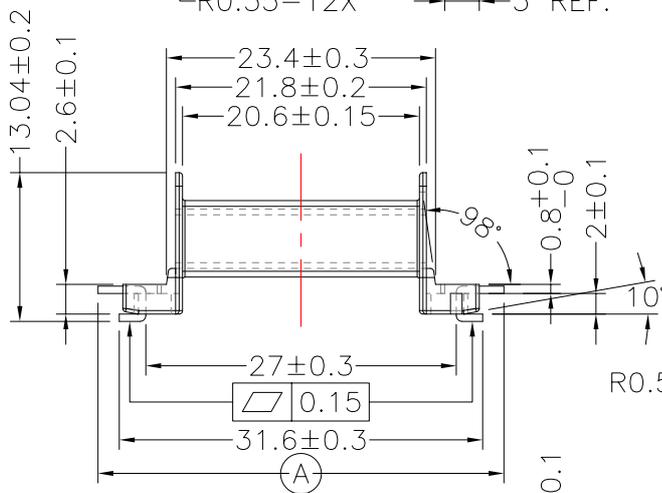


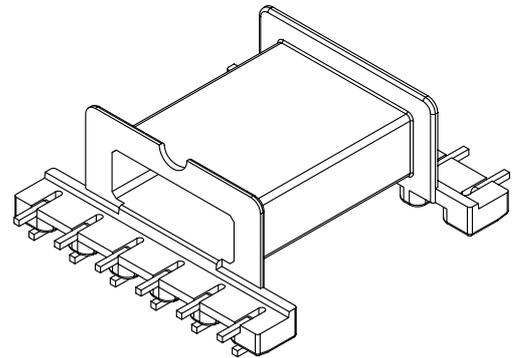

TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
1		YAN.TANG	G.F.YANG	10/14/08
2				
3				

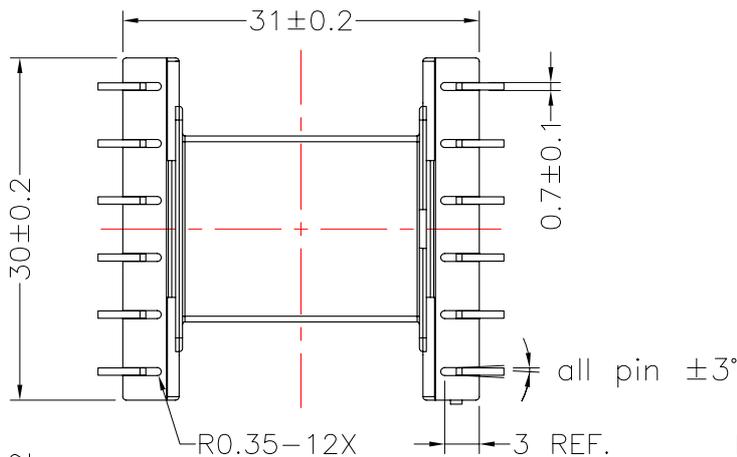

NOTE

- 針對107-05021.1136料號時, 要求 PIN 1, 4, 9不插
因為產品無防呆機構, 以塑膠PIN1標示數PIN時,
生產出的產品PIN1, 4, 9不插或者PIN3, 7, 10不插都是OK的;

DWG NO. EFD30-12P-J-5.0-B-11

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-107-05021.1103	PM-9630	P.B	Sn	ALL PIN (A)=35.3±0.3	
TBI-107-05021.1116	PM-9630	C.P WIRE	Sn	ALL PIN (A)=35.3±0.3	H
TBI-107-05021.1126	PM-9630	C.P WIRE	Sn	ALL PIN (A)=39.3±0.3	
TBI-107-05021.1136	PM-9630	C.P WIRE	Sn	CUT PIN#1,4,9 (A)=35.3±0.3	

TOLERANCE: .X±0.15 .XX±0.10 .XXX±0.05 UNIT : m / m SCALE 1.5 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1