

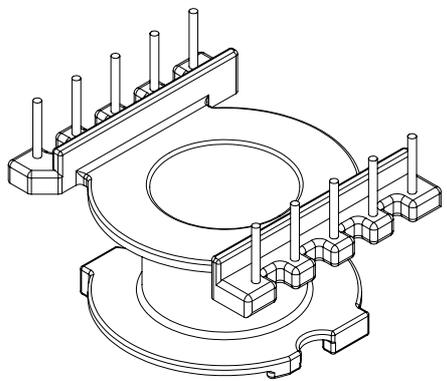
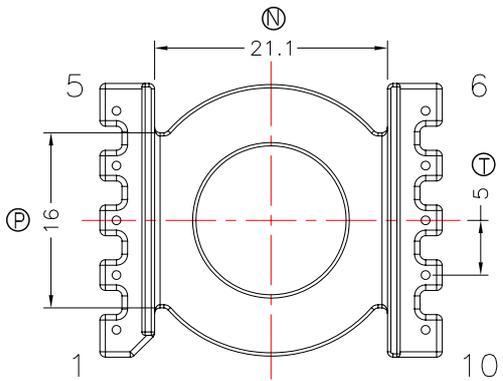
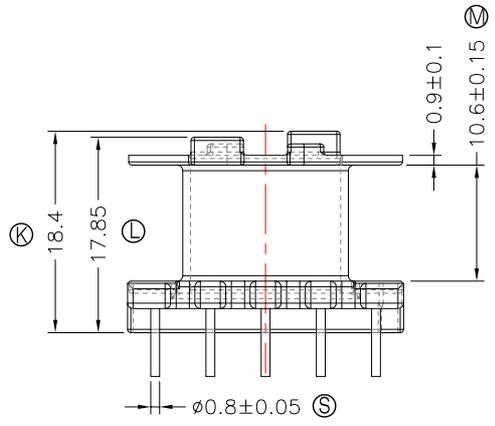
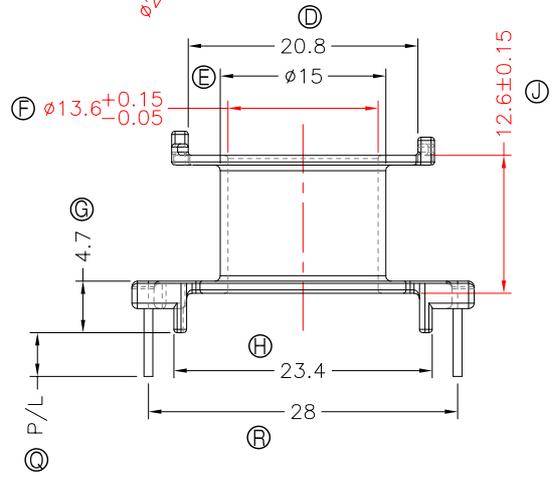


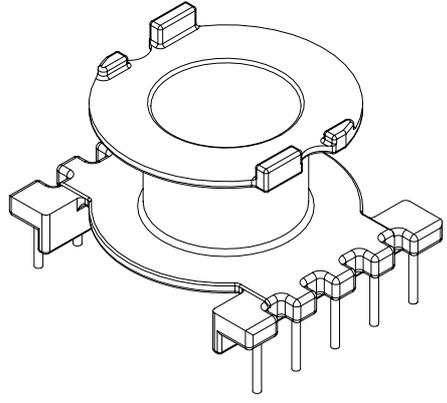

**TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
①		X.X.YUAN	G.F.YANG	12/01/15
②				
③				

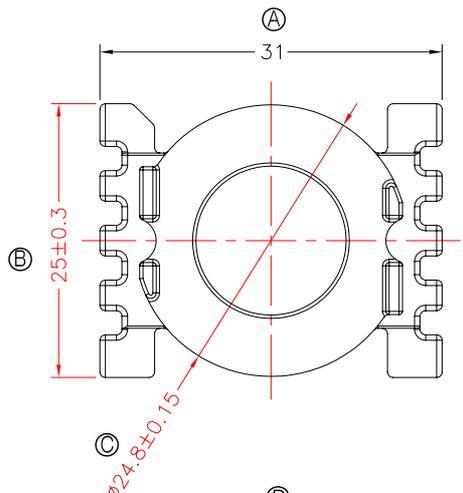

NOTE:  
1. 焊錫前拉力:1.0KG MIN, 焊錫後拉力:1.5KG MIN

DWG NO.	CC30-19-10P-TH-5.0-E-11				PIN ALLOCATION		NOTE
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION		NOTE	
TBI-239-02051.1106	PM-9630	CP WIRE	Sn	ALL PIN	P/L=4.0±0.2		
TBI-239-02051.1116	PM-9630	CP WIRE	Sn	ALL PIN	P/L=3.5±0.2	52GTBCC30192 H	

TOLERANCE: 0<L<=4: ±0.1 4<L<=16: ±0.2 16<L<=63: ±0.3 UNIT : m / m SCALE 3 : 2

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1