









TRANSFORMER BOBBIN  
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989  
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△6		T.S.LII	W.H.HSU	06/28/06
△7		T.S.LII	W.H.HSU	07/25/06
△8		T.S.LII	W.H.HSU	05/02/07

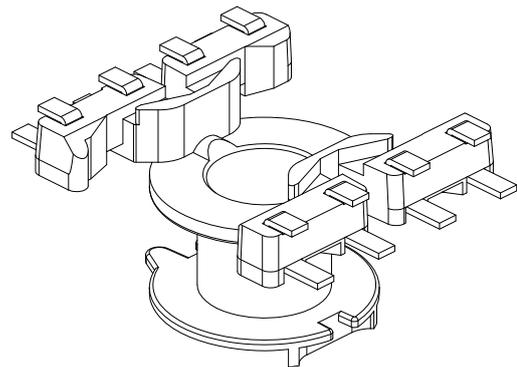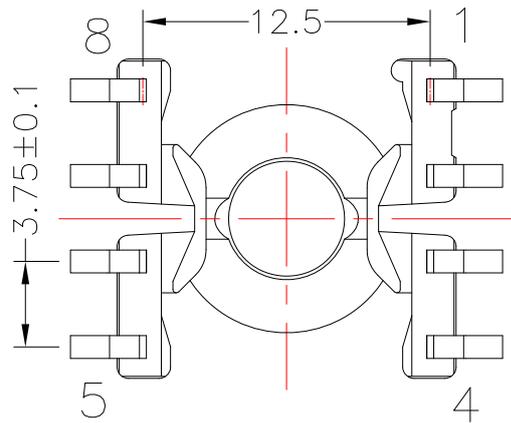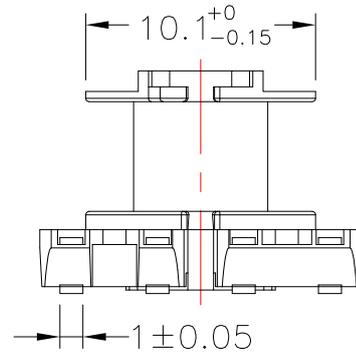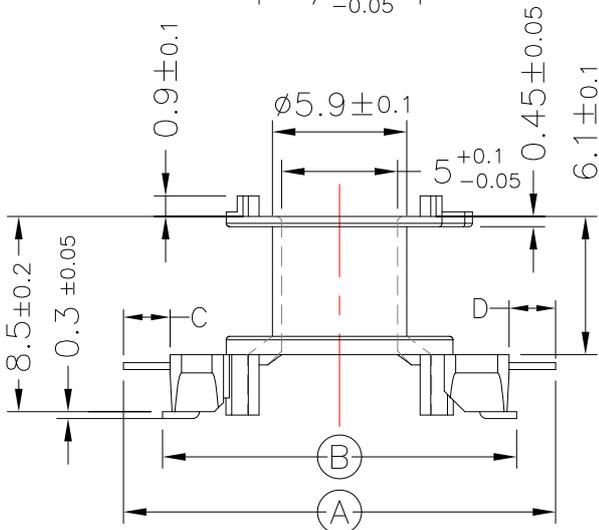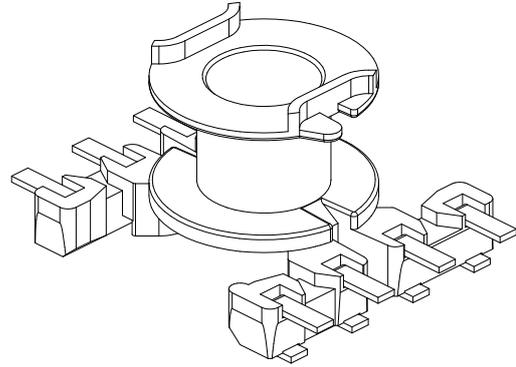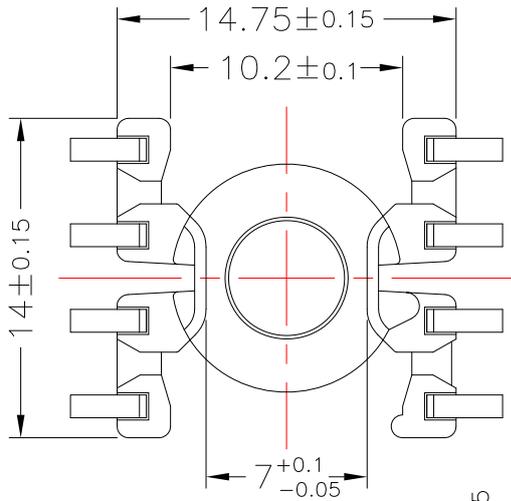

DWG NO. RM5-8P-J-3.75-B-1

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-108-03021.103	PM-9630	PB C5191	Sn	ALL PIN (A)=18.8±0.2(B)=15.4±0.2	
TBI-108-03021.113	PM-9630	PB C5191	Sn	ALL PIN (A)=17.8±0.2(B)=15.2±0.2	
TBI-108-03021.126	PM-9630	CP WIRE	Sn	ALL PIN (A)=18.8±0.2(B)=15.4±0.2	
TBI-108-03021.133	PM-9630	PB WIRE	Sn	ALL PIN (A)=18.8±0.2(B)=15.4±0.2 (C)=1.8±0.3(D)=1.8±0.3	

TOLERANCE : .X ±0.15 .XX ±0.10 .XXX ±0.05

UNIT : m / m

SCALE 3 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.  
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 8