









**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789999
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
1		G.F.YANG	W.H.HSU	06/29/10
2		YAN.TANG	G.F.YANG	08/25/10
3		X.H.GU	G.F.YANG	09/16/10

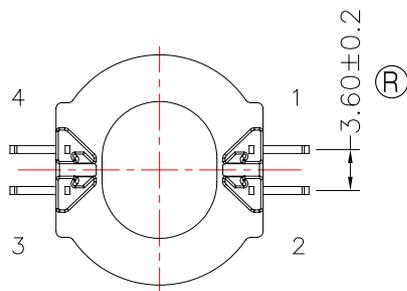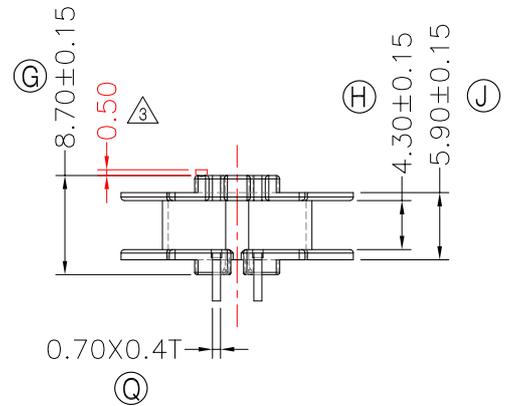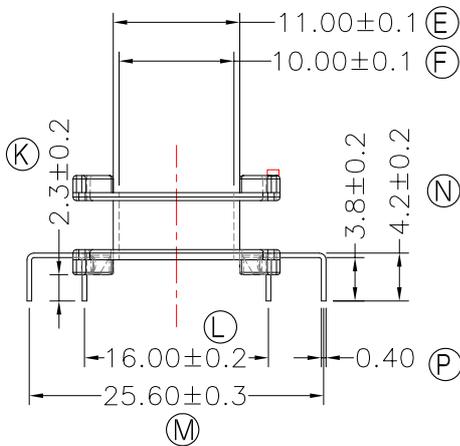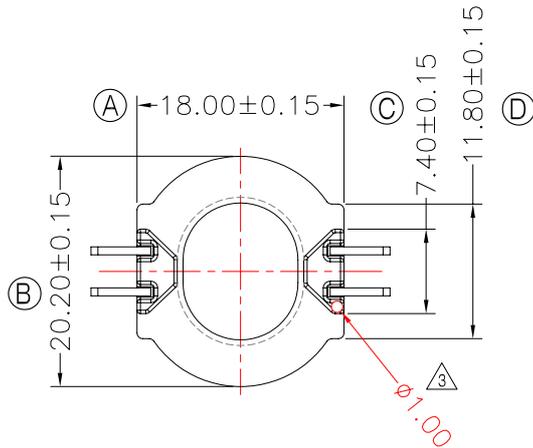

DWG NO. ATQ24-11.2-4P-TU-B9-11

PART NO. MATERIAL (BOBBIN) MATERIAL (TERMINAL) TERMINAL (PLATING) PIN ALLOCATION NOTE

TBI-238-01291.1106 PM-9630 CP WIRE Sn ALL PIN S

H

TOLERANCE: .XX±0.1 .XXX±0.05 UNIT : m / m SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 3

A-CORE

A-CORE JIANGMEN ELECTRONICS CO.,LTD
江門安磁電子有限公司

TBI

TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

ELECTRICAL CO. Tel : 86-750-3867791 Fax : 86-750-3867787

Tel : 86-769-88789999 Fax : 86-769-88789989



e-mail : sales@acore-ferrite.com

http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net




REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△1		G.F.YANG	W.H.HSU	06/29/10
△2		YAN.TANG	G.F.YANG	08/25/10
△3		X.H.GU	G.F.YANG	09/16/10

TOP

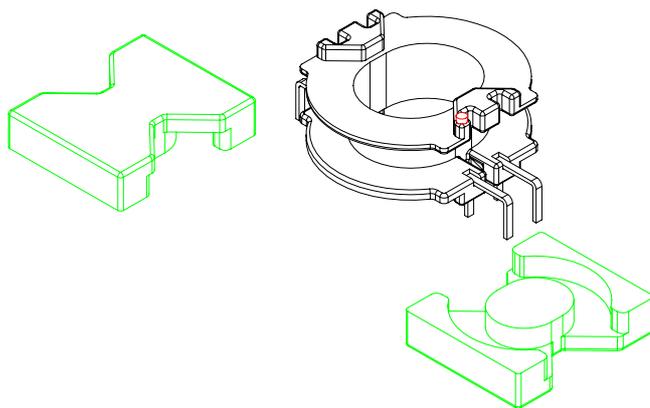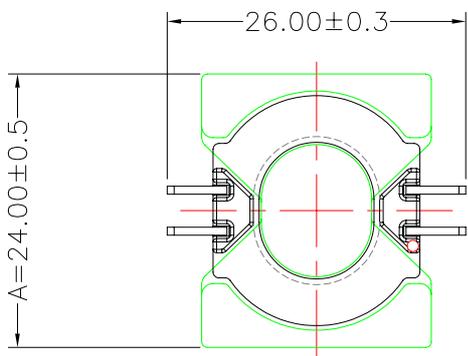


TOP

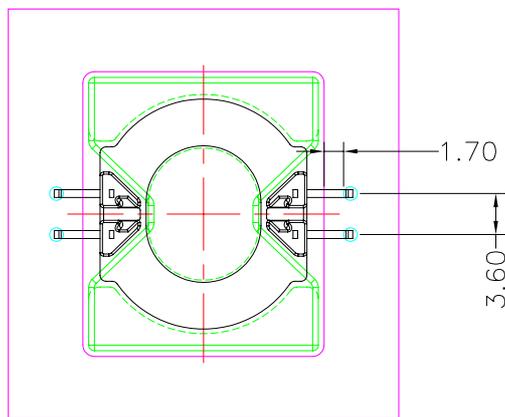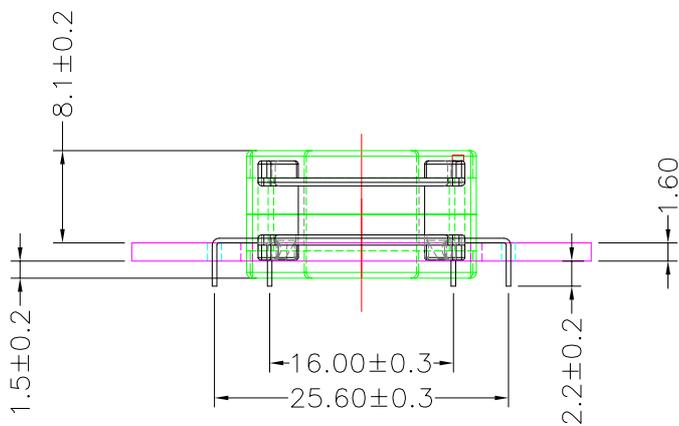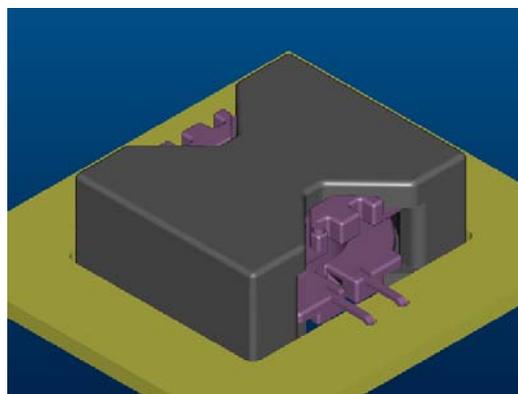

BOTTOM

BOTTOM

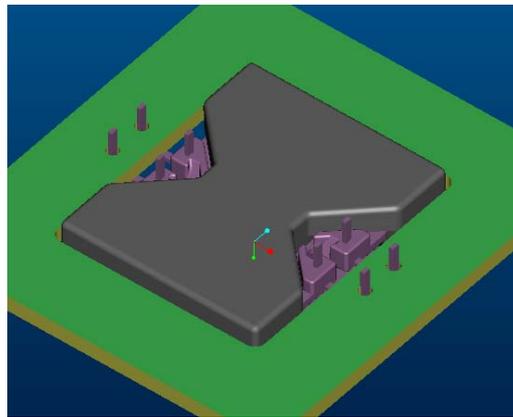

ITEM	PART NO.	MATERIAL	DWG NO.
CORE	ATQ24/11.2	JPP-44A	
CORE	ATQ24/11.2	JPP-95	
BOBBIN	TBI-238-01291.11XX		ATQ24-11.2-4P-TU-B9-11

Core Set Parameters

$A_e=99.9\text{mm}^2$
 $L_e=32.9\text{mm}$
 $C1=0.330\text{mm}^{-1}$
 $V_e=3286.71\text{mm}^3$



UNIT : m/m

SCALE 1 : 1

REV 3