








TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http://tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△		X.H.GU	G.F.YANG	10/20/16
△				
△				

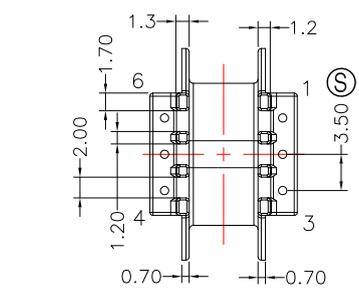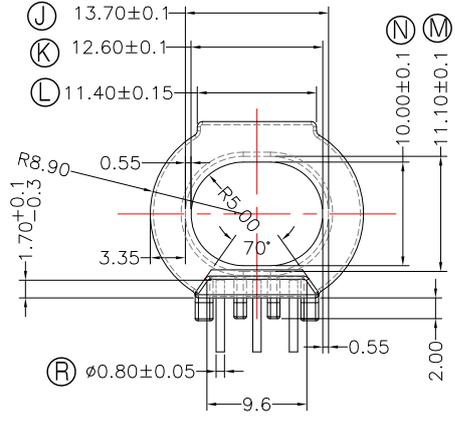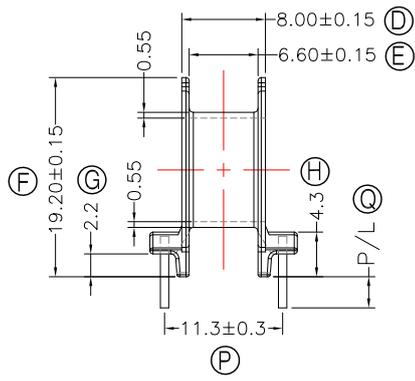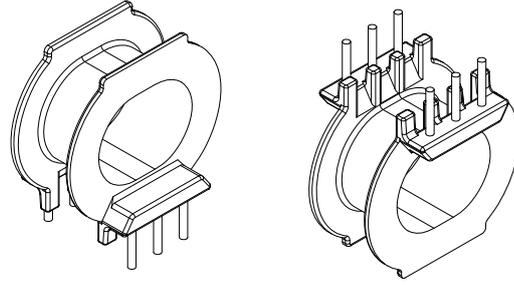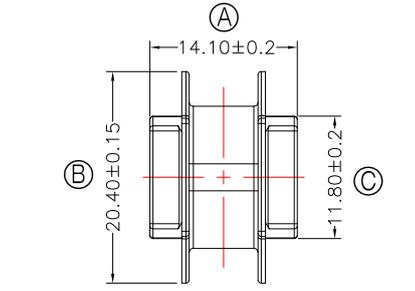

- NOTE:
- 1.任一點的強度為1.5kgMIN.
 - 2.耐壓4.0Kv /1.5mA 60S;
 - 3.焊錫溫度:450°±10° 3SEC
 - 4.PIN拉力須焊前1.0KgMIN焊后1.5KgMIN.
 - 5.Winding Space=6.6*3.35=22.11mm ^2

DWG NO.	ATQ23.7-14.6-6P-TH-E-17				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-238-10051.1706	PM-9823	CP WIRE	Sn	ALL PIN P/L=2.9±0.2	S
TBI-238-10051.1716	PM-9823	CP WIRE	Sn	CUT PIN#2,6 P/L=2.9±0.2	H
TBI-238-10051.1726	PM-9823	CP WIRE	Sn	CUT PIN#2,5,6 P/L=2.9±0.2	
TBI-238-10051.1736	PM-9823	CP WIRE	Sn	CUT PIN#5 P/L=2.9±0.2	
TBI-238-10051.1746	PM-9823	CP WIRE	Sn	CUT PIN#1,2,5 P/L=3.2±0.2	
TBI-238-10051.1756	PM-9823	CP WIRE	Sn	CUT PIN#2,5 P/L=3.0±0.2	
TBI-238-10051.1766	PM-9823	CP WIRE	Sn	CUT PIN#2,4,5 P/L=2.9±0.2	
TBI-238-10051.1776	PM-9823	CP WIRE	Sn	CUT PIN#3,4 P/L=2.9±0.2	
TBI-238-10051.1786	PM-9823	CP WIRE	Sn	CUT PIN#1,4 P/L=3.0±0.2	
TBI-238-10051.1796	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.2±0.2	
TBI-238-10051.17A6	PM-9823	CP WIRE	Sn	CUT PIN#2,4,5 P/L=4.0±0.2	
TBI-238-10051.17B6	PM-9823	CP WIRE	Sn	CUT PIN#3,4 P/L=4.0±0.2	
TBI-238-10051.17C6	PM-9823	CP WIRE	Sn	CUT PIN#2 P/L=3.0±0.2	
TBI-238-10051.17D6	PM-9823	CP WIRE	Sn	CUT PIN#2,6 P/L=3.2±0.2	
TBI-238-10051.17E6	PM-9823	CP WIRE	Sn	CUT PIN#2,5 P/L=2.7±0.2	
TBI-238-10051.17F6	PM-9823	CP WIRE	Sn	CUT PIN#2,4 P/L=3.4±0.2	
TBI-238-10051.17G6	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.7±0.2	
TBI-238-10051.17H6	PM-9823	CP WIRE	Sn	CUT PIN#3,6 P/L=2.9±0.2	
TBI-238-10051.17J6	PM-9823	CP WIRE	Sn	CUT PIN#6 P/L=3.2±0.2	
TBI-238-10051.17K6	PM-9823	CP WIRE	Sn	CUT PIN#1,2,3,4,5,6	
TBI-238-10051.17L6	PM-9823	CP WIRE	Sn	CUT PIN#1,5 P/L=2.9±0.2	
TBI-238-10051.17M6	PM-9823	CP WIRE	Sn	CUT PIN#3 P/L=3.0±0.2	
TBI-238-10051.17N6	PM-9823	CP WIRE	Sn	CUT PIN#3 P/L=3.4±0.2	
TBI-238-10051.17P6	PM-9823	CP WIRE	Sn	CUT PIN#3 P/L=5.0±0.2	

TOLERANCE: 0<L<=4: ±0.1 4<L<=16: ±0.2 16<L<=63: ±0.3 UNIT : m/m SCALE 1:1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches)max.

REV 1