








TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

Tel : 86-769-88789999 Fax : 86-769-88789989
http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS


REV	SYM	DRAFTER	CHECKER	DATE
△1		X.H.GU	G.F.YANG	03/14/22
△2				
△3				

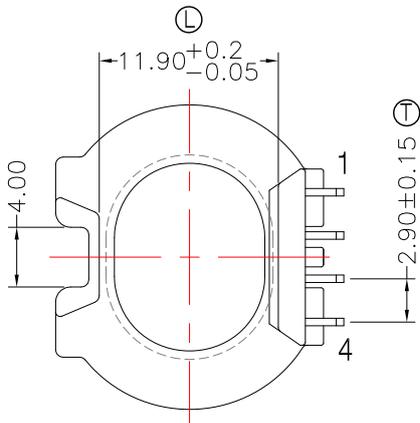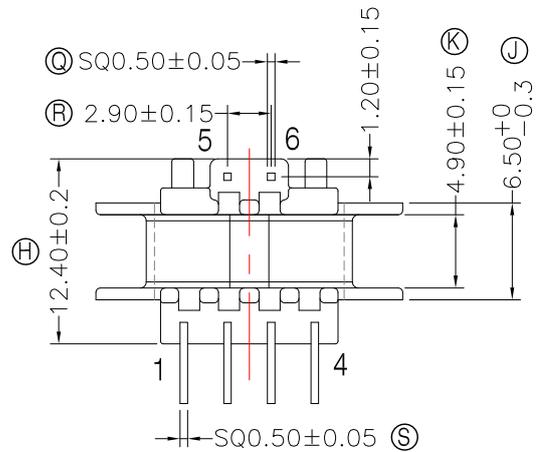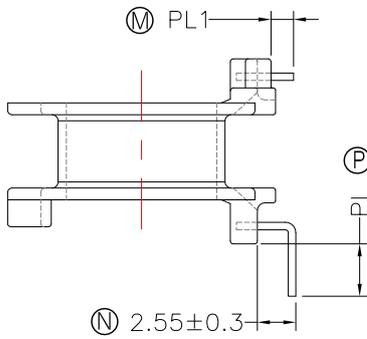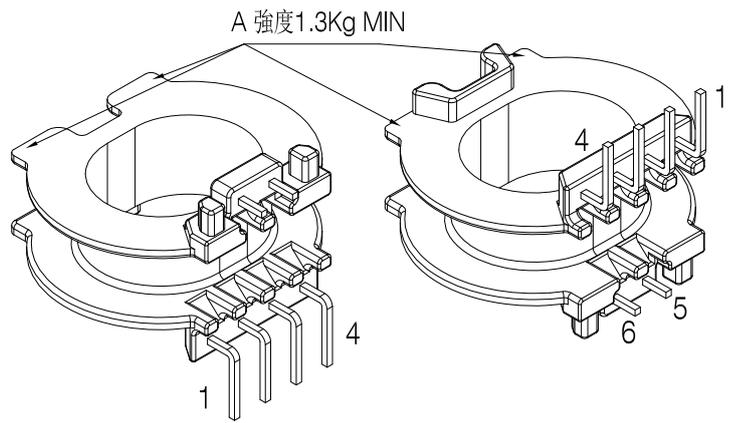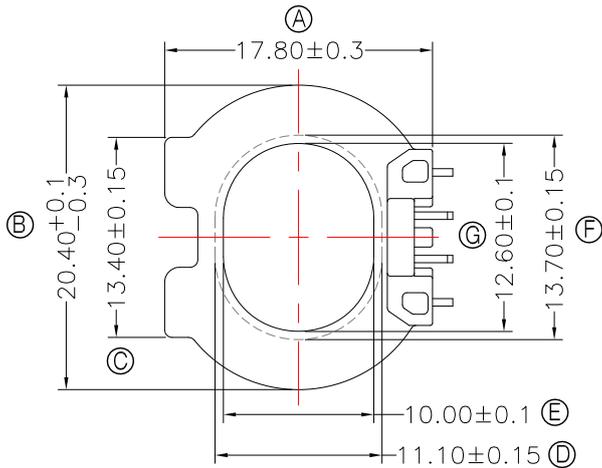

NOTE:

- 耐壓4.0Kv /1.5mA 60S;
- 焊錫溫度:450°±10° 3SEC
- 任一點的強度為1.5kg MIN, 其中.A.處為1.3kg MIN
- 焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
- Winding Space=4.9*3.35=16.41mm²

DWG NO.	ATQ23.7-12.9A-6P-TL-F7-17			
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION
TBI-238-10671.1706	PM-9823	CP WIRE	Sn	ALL PIN PL=3.5±0.3 PL1=1.5±0.2 S
TBI-238-10671.1716	PM-9823	CP WIRE	Sn	NO PIN#5,6 PL=5.0±0.2 PL1=1.5±0.2 H



TOLERANCE: 0<L<=4: ±0.1 4<L<=16: ±0.2 16<L<=63: ±0.3

UNIT : m/m

SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min,Base nickel 0.625 μ m (25 μ inches) min.
2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μ m (200 μ inches) min.
3. Coplanarity deviation: 0.10 mm (0.004 inches)max.

REV 1

A-COREA-CORE JIANGMEN ELECTRONICS CO.,LTD
江門安磁電子有限公司**TBI**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.

ELECTRICAL CO. Tel : 86-750-3867791 Fax : 86-750-3867787

Tel : 86-769-88789999 Fax : 86-769-88789989




e-mail : sales@acore-ferrite.com

http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
△1		X.H.GU	G.F.YANG	03/14/22
△2				
△3				

TOP

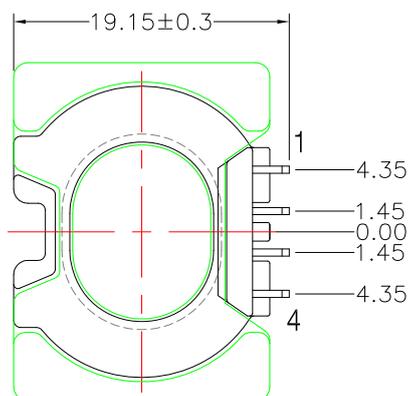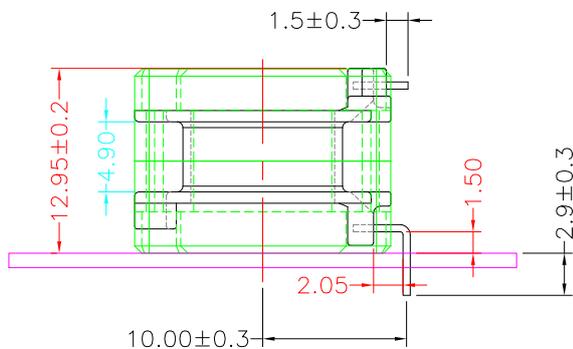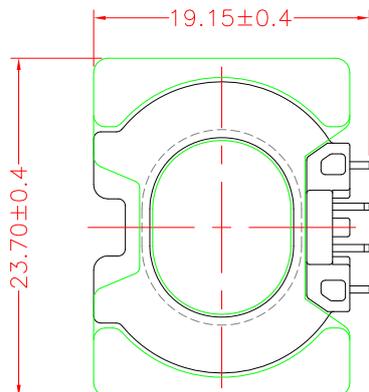

BOTTOM

ITEM	PART NO.	MATERIAL	DWG NO.	Core Set Parameters
CORE	ATQ23.7/12.9A	JPP-44A		$A_e=100\text{mm}^2$ $L_e=35.2\text{mm}$ $C_1=0.352\text{mm}^{-1}$ $V_e=3520\text{mm}^3$
CORE	ATQ23.7/12.9A	JPP-95		
BOBBIN	TBI-238-10671.17XX		ATQ23.7-12.9A-6P-TL-F7-17	



UNIT : m / m

SCALE 1 : 1

REV 1