

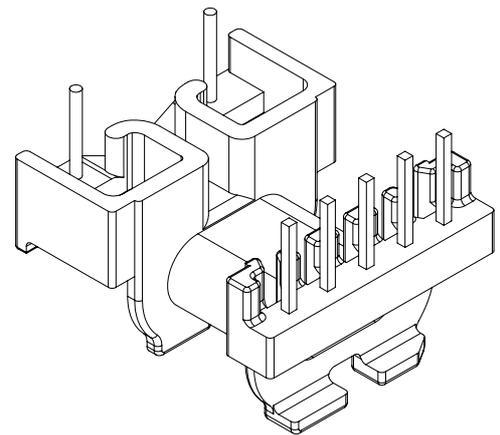
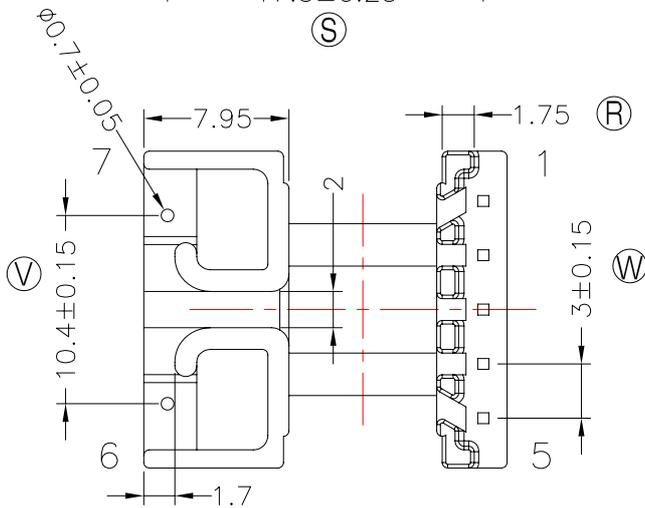
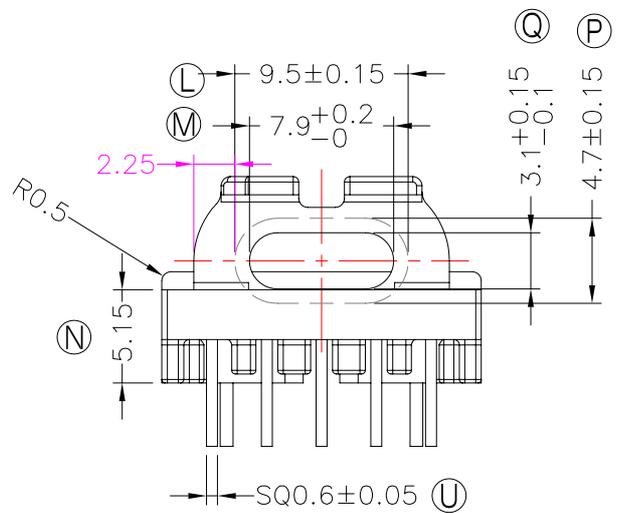
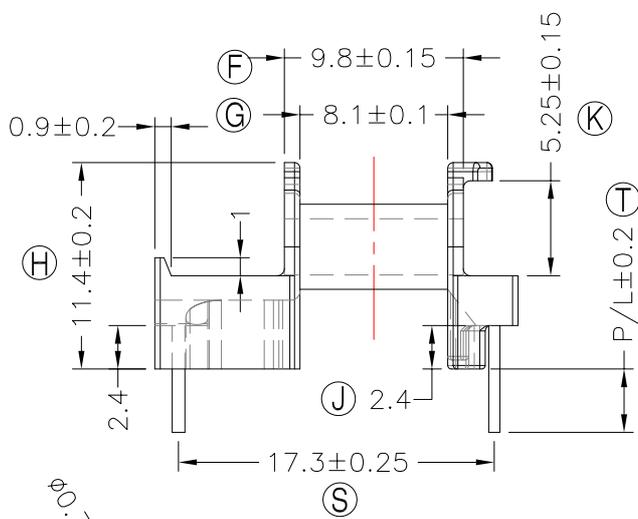


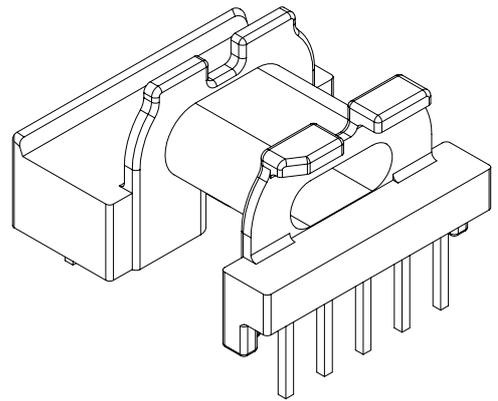

**TRANSFORMER BOBBIN
INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
1		X.H.GU	G.F.YANG	10/07/16
2				
3				

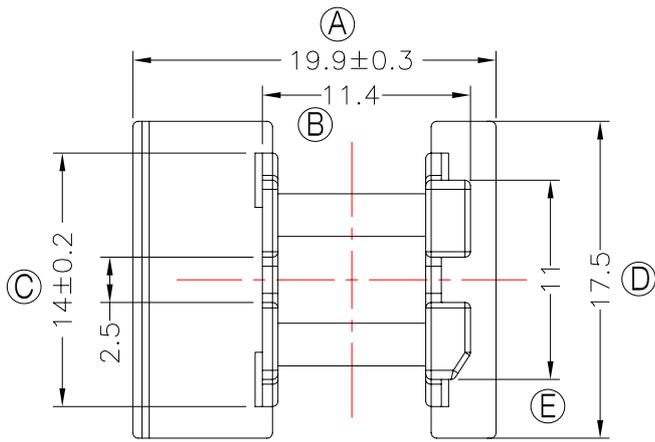

DWG NO. EPC17-15.5-7P-TH-A2-17

PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-206-01121.1706	PM-9823	CP WIRE	Sn	ALL PIN P/L=3.5±0.2	S
TBI-206-01121.1716	PM-9823	CP WIRE	Sn	CUT PIN #3, P/L=3.5±0.2	H
TBI-206-01121.1726	PM-9823	CP WIRE	Sn	CUT PIN #3, P/L=2.4±0.2	
TBI-206-01121.1736	PM-9823	CP WIRE	Sn	CUT PIN #3, P/L=2.9±0.2	

TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3 UNIT : m / m SCALE 1 : 1






Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100%,5 μm (200 μ inches) min.
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV 1

A-CORE
ELECTRICAL CO.

A-CORE JIANGMEN ELECTRONICS CO.,LTD
 江门安磁电子有限公司
 Tel: 86-750-3867791 Fax : 86-750-3867787

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
△1		X.H.GU	G.F.YANG	08/29/12
△2		X.H.GU	G.F.YANG	12/17/12
△3				

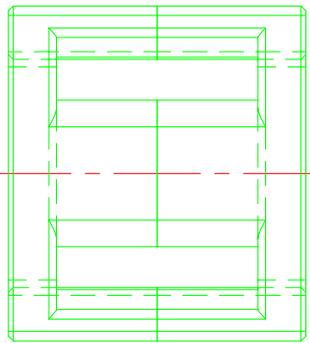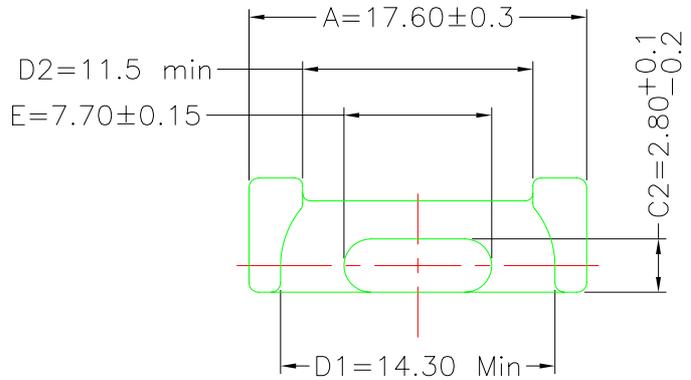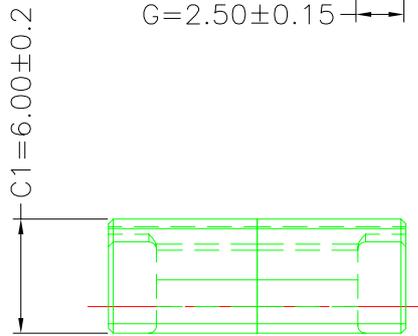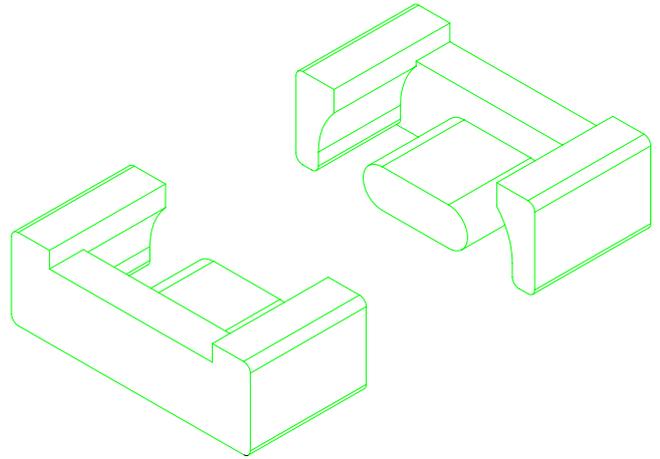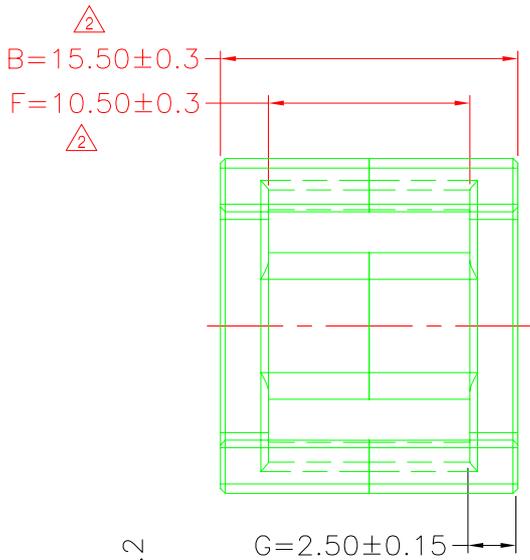

Core Set Parameters

$A_e = 22.60 \text{ mm}^2$
 $L_e = 39.6 \text{ mm}$
 $C1 = 1.75 \text{ m}^{-1}$
 $V_e = 894.96 \text{ mm}^3$

DWG NO.	EPC17/15.5 CORE				
PART NO.	MATERIAL (CORE)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
EPC17/15.5	JPP-44A				
EPC17/15.5	JPP-95				

Finish:	TOLERANCE: $0 < L \leq 4: \pm 0.1$ $4 < L \leq 16: \pm 0.2$ $16 < L \leq 63: \pm 0.3$	UNIT : m / m	SCALE 1 : 1
			REV 2

