

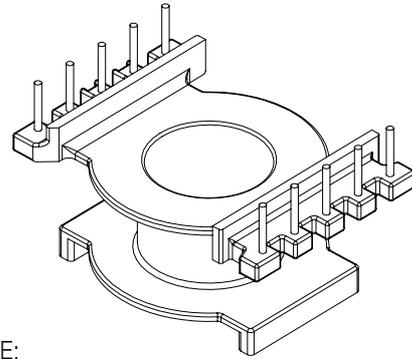
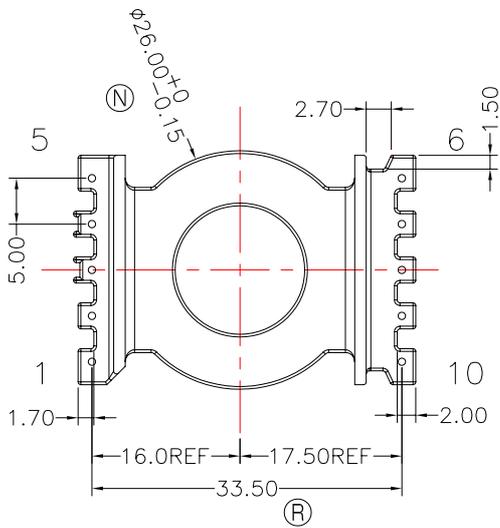
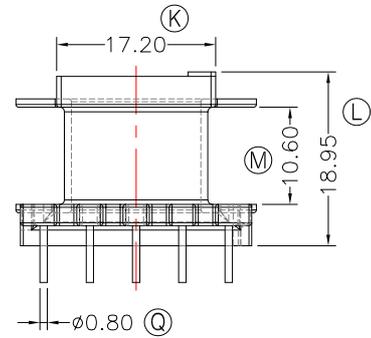
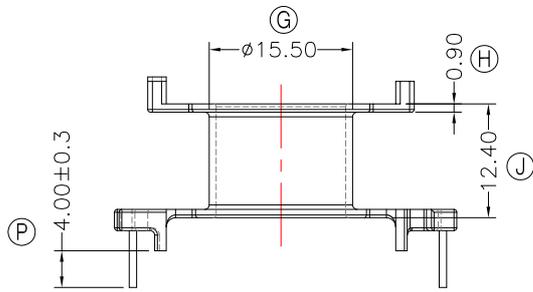


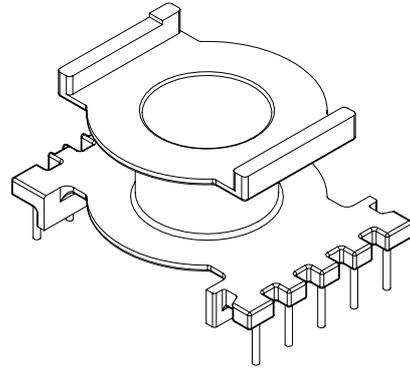

**TRANSFORMER BOBBIN INDUSTRIAL CO.,LTD.**

Tel : 86-769-88789999 Fax : 86-769-88789989  
 http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net

REVISIONS				
REV	SYM	DRAFTER	CHECKER	DATE
①		F.LU	G.F.YANG	03/25/13
②				
③				

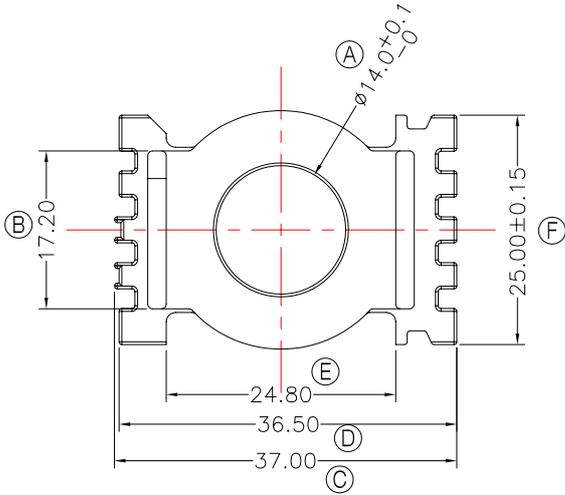

- NOTE:
- 1.WINDING SPACE: 5.25mm\*10.6mm=55.65 mm<sup>3</sup>
  - 2.焊錫前拉力:1.0KG MIN,焊錫後拉力:1.5KG MIN;
  - 3.任意一點強度須2.0kg MIN;

DWG NO.	CC3319-10P-TH-5.0-D6-12				
PART NO.	MATERIAL (BOBBIN)	MATERIAL (TERMINAL)	TERMINAL (PLATING)	PIN ALLOCATION	NOTE
TBI-239-04461.1206	PM-9820	CP WIRE	Sn	ALL PIN	S
					H

TOLERANCE: 0<L<=4:±0.1 4<L<=16:±0.2 16<L<=63:±0.3 UNIT : m / m SCALE 1 : 1

Finish: 1. PB wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min,Base nickel 0.625 μm (25 μ inches) min.  
 2. CP wire Immersion Sn on terminal : Thickness:Sn plating,100,5 μm (200 μ inches) min.  
 3. Coplanarity deviation: 0.10 mm (0.004 inches) max.

REV	1
-----	---



**A-CORE**

A-CORE JIANGMEN ELECTRONICS CO.,LTD  
 江門安磁電子有限公司

**TBI**

TRANSFORMER BOBBIN  
 INDUSTRIAL CO.,LTD.

ELECTRICAL CO. Tel : 86-750-3867791 Fax : 86-750-3867787

Tel : 86-769-88789999 Fax : 86-769-88789989



e-mail : sales@acore-ferrite.com

http:// tbi-tw.com e-mail : tb6688@ms46.hinet.net





REVISIONS

REV	SYM	DRAFTER	CHECKER	DATE
2		F.LU	G.F.YANG	03/25/13
3				
4				

TOP

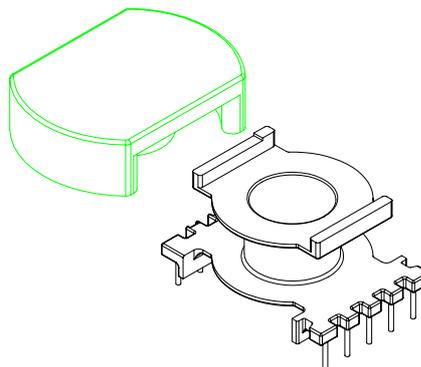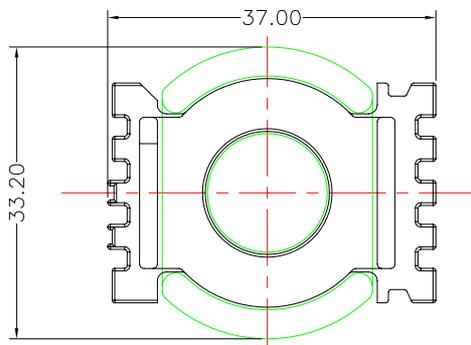

TOP

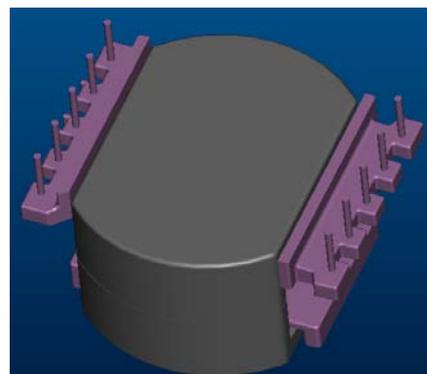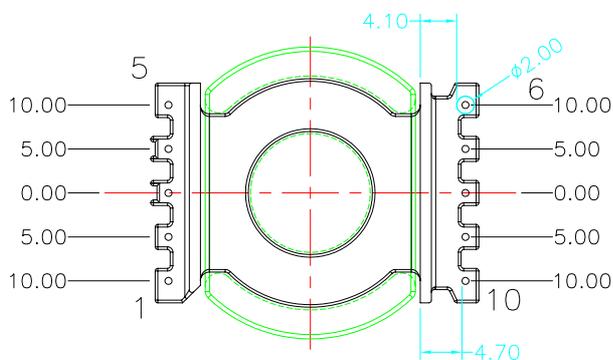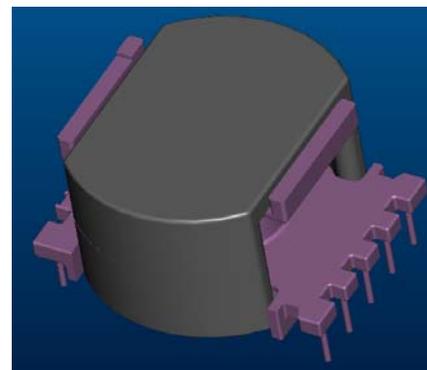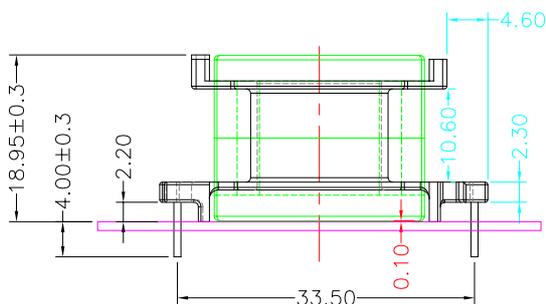

BOTTOM

BOTTOM

ITEM	PART NO.	MATERIAL	DWG NO.	Core Set Parameters
CORE	CC33/19	JPP-44A		$A_e=147\text{mm}^2$ $L_e=51.4\text{mm}$ $C_1=0.35\text{mm}^{-1}$ $V_e=7555.8\text{mm}^3$
CORE	CC33/19	JPP-95		
BOBBIN	TBI-239-04461.12XX		CC3319-10P-TH-5.0-D6-12	



UNIT : m / m

SCALE 1 : 1

REV 1